

# A2 -100%

## Automatic Dispenser



➡ 100% Recirculation

➡ Box Tinting

**SANTINT • U.S.A**

Add: 2000 Bloomingdale Road,  
Suite 220, Glendale Heights,  
IL 60139, U.S.A  
Email: frank@santint.com

**SANTINT • HOLLAND**

Add: Lageweg 35 - J, 2222 AG  
Katwijk The Netherlands  
Email: sales@santint-europe.com

**SANTINT • POLAND**

Add: ul. Postepu 19. mag.5  
02-676 Warszawa Polska  
Email: gianni.capozzi@santint.com

**SANTINT • AUSTRALIA**

Add: 3 Technology Circuit  
Hallam Victoria, Australia  
Email: Info.AU@santint.com

**SANTINT • CHINA**


Add: Feilong Road, Xingyang,  
Zhengzhou, China  
Email: info@santint.com

# A2-100% FEATURES >>>



## 1 100% Recirculation

Zero nozzle dryness/blockage;  
purge-free;  
maintenance-free;  
colorant saving;  
stable accuracy.

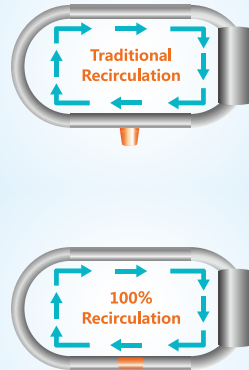

## 2 Box Tinting

Saving PC cost;  
pre-installed software,  
shorter installation time.




## 3 Calibration-free Piston Pump



## 4 Piston Rod Detection

Warning when the piston is not pushed down.



**P1 Piston Pump**  
Sequential Dispensing

■ Flow Rate 0.63 qt/min  
■ Efficiency 0.21 qt/min

■ Minimum Shot  
1/384Y(0.0000813 qt)

■ Pump Capacity 0.06 qt  
■ Stirring Speed 20 rpm

■ No. of Canisters Up to 16  
■ Canister Size 1.9 qt / 2.43 qt / 4.02 qt

■ Max Can Size ( D X H ) 12.6X23.62 in  
■ Machine Dimension ( W X D X H ) 27.83X33.39X51.18 in  
■ Packing Dimension ( W X D X H ) 32.68X38.98X59.06 in  
Loading Quantity 14 Pieces/20"Container

■ Net Weight 308.65 lbs      ■ Power ≤ 100W  
■ Gross Weight 363.76 lbs    ■ Power Supply 220V/110V 50Hz/60Hz

# A2 - 100% Technical Parameters